



iviewkorea

DOC. NO.

RD- TM22015XUB-H-001

REV.

PAGE

DATE

TM22015XUB

01

1 OF 6

2012,06,07

TM22015XUB

**IR Touch 22" Matrix Module
(Interface USB Type)**

RoHS Compliance

IVIEWKOREA

www.iviewkorea.com# 1705, 660 Gasan-dong,


Geumcheon-gu, Seoul, South Korea

TEL : 02. 2038. 8570

Our Signature	Design	checked	Approved

For Customer Approval			

Please return one of these to us immediately with your Signature for Approval

 iviewkorea	DOC. NO.	RD-TM22015XUB-H-001	REV.	PAGE	DATE
		TM22015XUB	01	2 OF 6	2012,06,07

Contents

1. Specification	-----	3
2. Electrical	-----	3
3. Interface (Connector & Cable)	-----	4
4. Dimension & View	-----	5
5. Warranty	-----	6

Revision History

Rev	Date	Description	Remark
01	2012,06,07	Start	Ver 01

Note

- The Components(Firmware, Hardware, Mechanical Design ...) of This Product will be Changed without any Customers Approval.

1. Specification

Item	Description
Detection	Infrared interruption detecting system with infrared sensors
Outline	563.6 (H) x 377.6(V) x 13.7(D) mm
Detection Area	475.8 (H) x 298 (V) mm (Diagonal 22")
An optical element Space	5.0 (H) x 5.0(V) mm
The number of optical elements	94(H) x 59(V) pcs
Touch plate	Standard) Tempered glass (4T)
Scanning Rate	Normal Mode : 20msec (Typ) Sleep Mode : 50msec (Typ)

Interface) USB


Item	Description
Interface	USB2.0
Signal	D+ , D- , VBUS, GND
Speed	12MBps (Full Speed)
Transfer Mode	Interrupt Mode

2. Electrical & Environmental

Item	Description
Supply voltage	DC +5V
Current	500mA
Temperature	Operation : 0 ~ 50℃
Humidity	Operation : 0 ~ 85%
Resistance of ambient light	Side light 5,000 Lx (incident angle 20°) Front light 60,000 Lx (incident angle 90°)

3. Interface (Connector)


1) USB interface - CN1 (Molex-53261-10)



Pin No.	Description	Pin No.	Description
1	VCC	6	USB DP
2	Tx	7	Samba_Boot
3	Rx	8	OSD TD
4	GND	9	OSD RD
5	USB DM	10	GND


2).Cable

(1) USB TYPE (USB CONNECTOR AND 51021-10P) - 2M

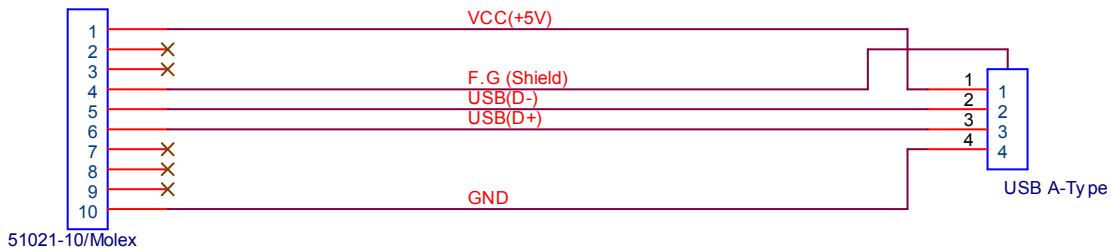


4. Dimension & View

4.1 Front View

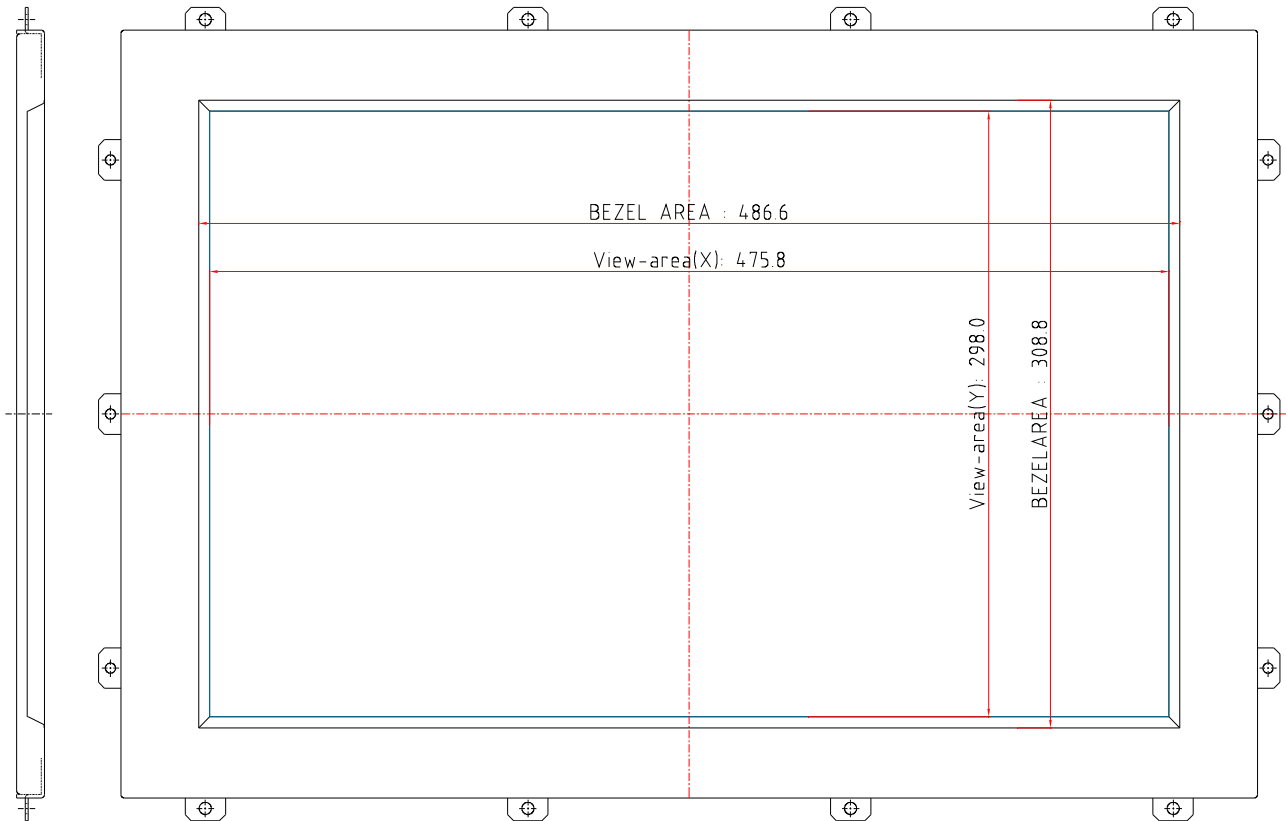

(22"IR-TOUCH MONITOR ASS'Y:FRONT-VIEW)

4.2 Rear View

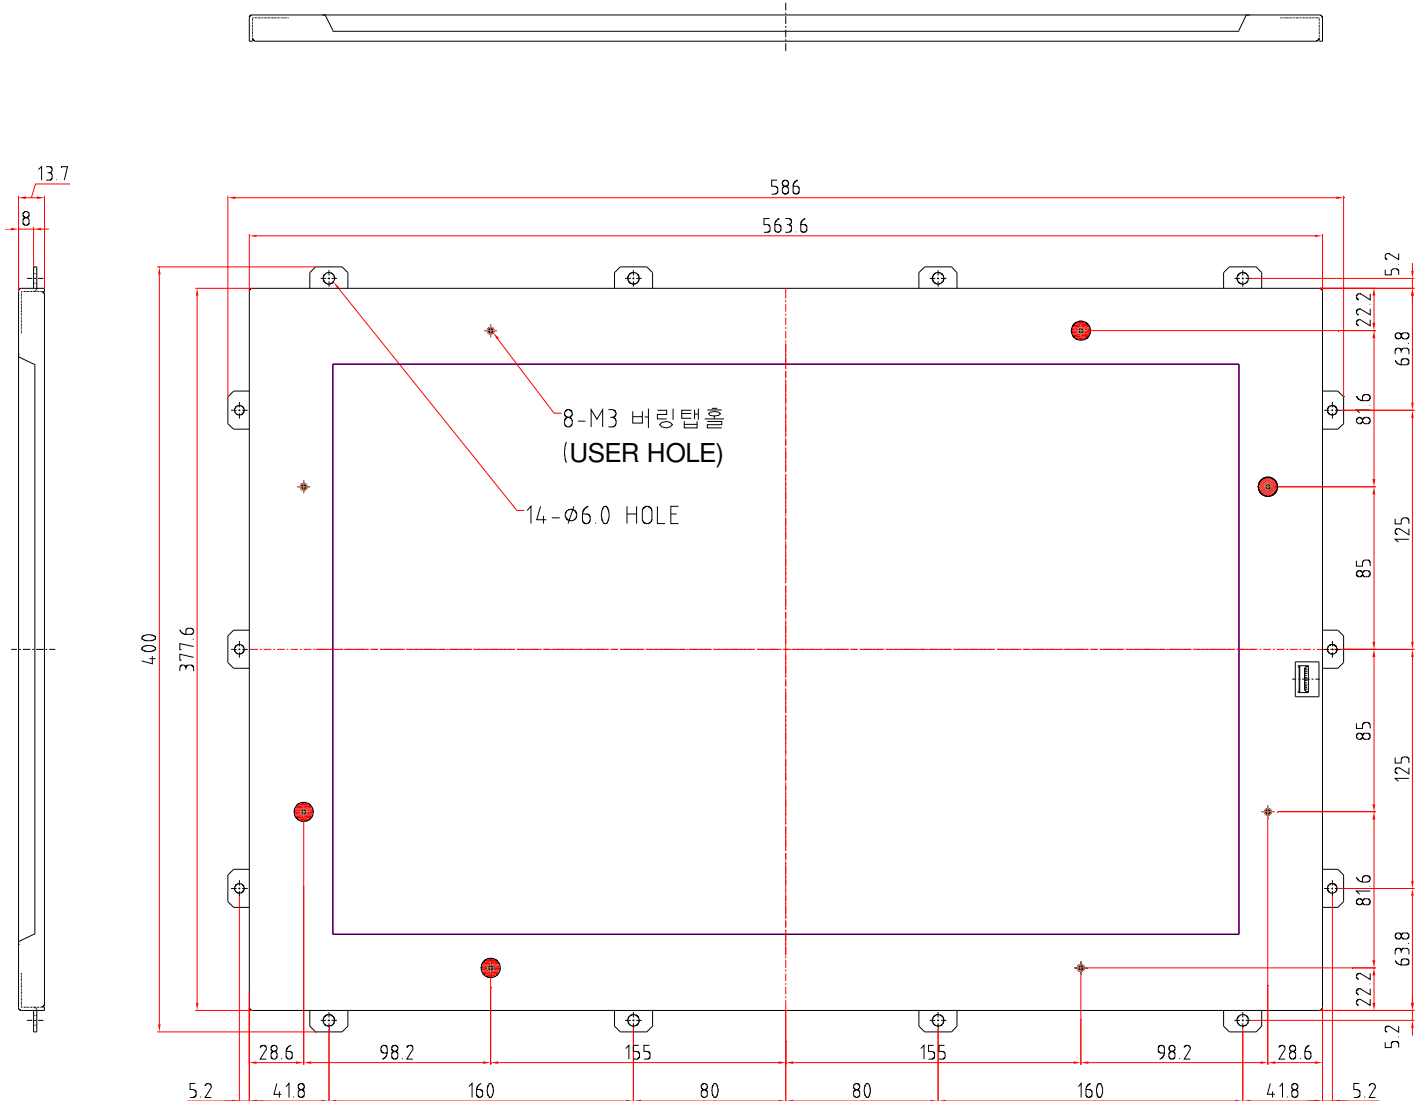

(22"IR-TOUCH MONITOR ASS'Y:REAR-VIEW)

5. Warranty

This product manufactured to this specification should be capable of meeting all characteristics for 12 Months from the delivery date of Hwayoung Systems Co., Ltd. when stored and used as specified in this document.

Use of this product outside the specified criteria herein will negate the 12 Months warranty
The damages (defaults) described below are NOT covered under the warranty.

- User fault through lack of care.
- User fault through intentional dismantle or attempted repair.
- Damage caused by natural disaster. (Fire, Flood, Earthquake, Lightning, etc.)
- Replacement of any parts.